


Connection between RadonixPC+ and ADTECH QS7

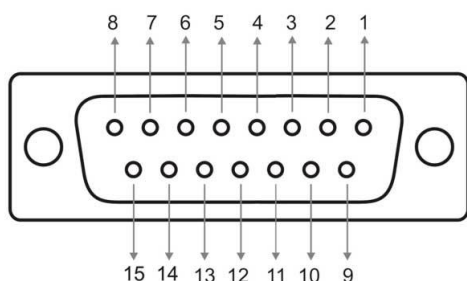

18	16	14	12	10	8	6	4	2
17	15	13	11	9	7	5	3	1
36	34	32	30	28	26	24	22	20
35	33	31	29	27	25	23	21	19

RadonixPC+ (DB15F)

ADTECH QS7 (DB36)

RadonixPC+ Pin	Description	QS6 Pin
1	VCC +24 V	9
2	Direction -	26
3	Direction +	27
4	Pulse -	24
5	Pulse +	25
6	Servo On	10
7	Ready	5
8	Encoder Zero	28
9	Reset Alarm	14
10	Ground	
11	Ground	6
12	Ground	16
13	Ground	29
14	Ground	
15	Ground	