


Connection between RadonixPC-Pro and Leadshine ES-D808

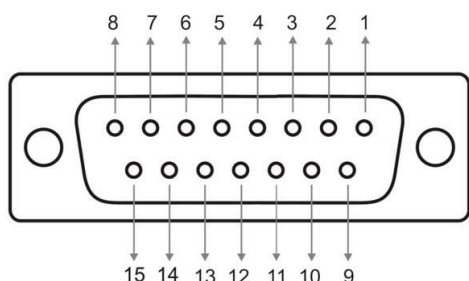

RadonixPC-Pro (DB15F)

Leadshine ES-D808 (DB44)

RadonixPC-Pro Pins	Description	EL5 CN1 Pins
1	VCC +24 V	ENA+
2	Direction -	DIR-
3	Direction +	DIR+
4	Pulse -	PUL-
5	Pulse +	PUL+
6	Servo On	ENA-
7	Ready	ALM+
8	Encoder Zero	
9	Alarm Reset	
10	Ground	
11	Ground	
12	Ground	ALM-
13	Ground	
14	Ground	
15	Ground	