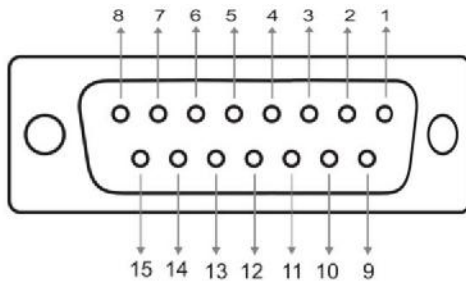
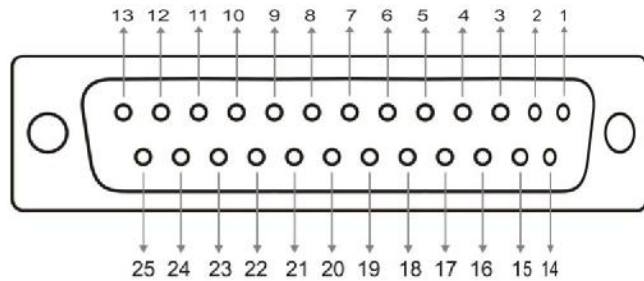


## Connection between RadonixPC+ and DELTA ASDA-B

**RadonixPC+ (DB15F)****ASDA-B (DB25F)**

| RadonixPC+ Pin | Description  | ADSA-B Pin |
|----------------|--------------|------------|
| 1              | VCC +24 V    | 4          |
| 2              | Direction -  | 20         |
| 3              | Direction +  | 19         |
| 4              | Pulse -      | 22         |
| 5              | Pulse +      | 21         |
| 6              | Servo On     | 17         |
| 7              | Ready        | 16         |
| 8              | Encoder Zero | 25         |
| 9              | Reset Alarm  | 18         |
| 10             | Ground       |            |
| 11             | Ground       | 3          |
| 12             | Ground       | 8          |
| 13             | Ground       | 13         |
| 14             | Ground       | 14         |
| 15             | Ground       | 15         |