


Connection between RadonixPC and Kinco-JD

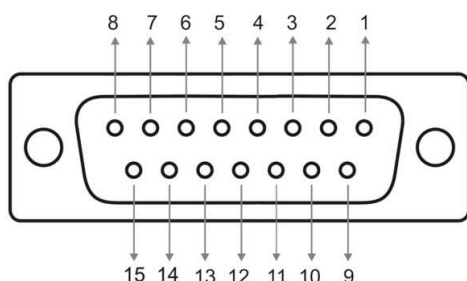

RadonixPC (DB15F)

Kinco-JD (X5&IO-Interface)

RadonixPC+ Pin	Description	Kinco-JD Pin	Drive-CNN
1	VCC +24 V	1 & 3 & 8	IO-Interface
2	Direction -	15	X5
3	Direction +	10	X5
4	Pulse -	5	X5
5	Pulse +	4	X5
6	Servo On	4	IO-Interface
7	Ready	18	IO-Interface
8	Encoder Zero		
9	Reset Alarm	5	IO-Interface
10	Ground		
11	Ground	2	X5
12	Ground	9	IO-Interface
13	Ground	10	IO-Interface
14	Ground	19	IO-Interface
15	Ground		