



## Connection between RadonixPC+ and Panasonic MINAS A5E

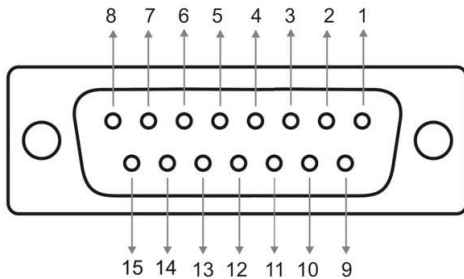

**RadonixPC+ (DB15F)**

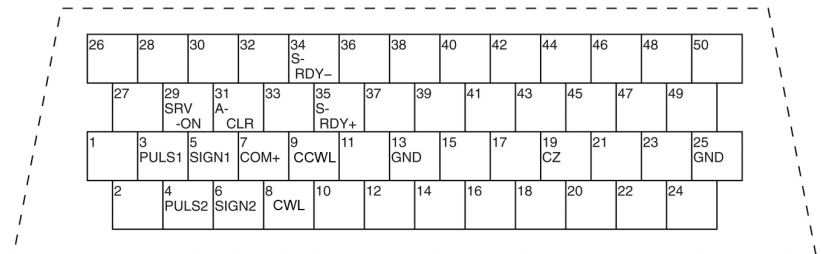

**MINAS A5E (50 Pins)**

| RadonixPC+ Pin | Description  | MINAS A5E Pin |
|----------------|--------------|---------------|
| 1              | VCC +24 V    | 7             |
| 2              | Direction -  | 6             |
| 3              | Direction +  | 5             |
| 4              | Pulse -      | 4             |
| 5              | Pulse +      | 3             |
| 6              | Servo On     | 29            |
| 7              | Ready        | 35            |
| 8              | Encoder Zero | 19            |
| 9              | Reset Alarm  | 31            |
| 10             | Ground       |               |
| 11             | Ground       | 8             |
| 12             | Ground       | 9             |
| 13             | Ground       | 13            |
| 14             | Ground       | 25            |
| 15             | Ground       | 34            |