



Connection between RadonixPC+ and TECO JSDA Series

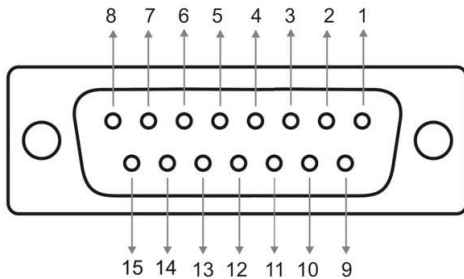

RadonixPC+ (DB15F)

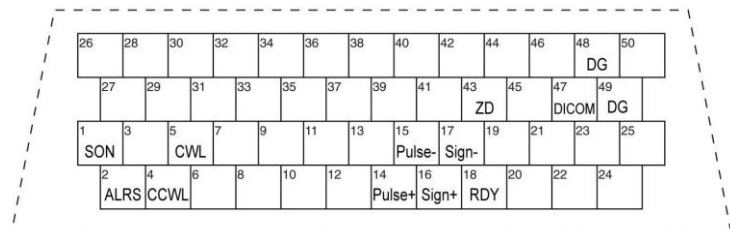

JSDA (50 Pins)

RadonixPC+ Pin	Description	JSDA Pin
1	VCC +24 V	47
2	Direction -	17
3	Direction +	16
4	Pulse -	15
5	Pulse +	14
6	Servo On	1
7	Ready	18
8	Encoder Zero	43
9	Alarm Reset	2
10	Ground	
11	Ground	
12	Ground	4
13	Ground	5
14	Ground	48
15	Ground	49